

Application # <u>2-22-2019</u>	Fees Paid <u>      </u>
Date Received: <u>                    </u>	Accepted by <u>                    </u>
Date deemed complete <u>                    </u>	App Deny Conditions <u>                    </u>



**APPLICATION FOR ORDINANCE TEXT  
AMENDMENT  
CITY OF GREENVILLE, SOUTH CAROLINA**

**APPLICANT INFORMATION**

City of Greenville	864-467-5735
NAME	FAX
206 S Main Street	Communitydevelopment@greenvillesc.gov
ADDRESS	EMAIL
Greenville, SC 29601	<i>John Wiley</i>
864-467-4570	SIGNED
PHONE	1/27/20
	DATE

**REQUEST**

19-3.2.2 (Q) and 19-6.12  
PERTINENT CODE SECTION(S)

**NARRATIVE DESCRIPTION/PROPOSED REVISION(S):**

Planning and Community Development staff have been working with the four neighborhoods that are designated as Neighborhood Revitalization Overlay districts to update the design guidelines for their districts. Currently, the guidelines for each district are written as optional, even though they are enforceable based on the text of the ordinance. This proposals streamlines the guidelines into one document, incorporates them into the Land Management Ordinance and designates them as design standards.

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

**INSTRUCTIONS**

1. THE APPLICATION AND FEE, **MADE PAYABLE TO THE CITY OF GREENVILLE**, MUST BE RECEIVED BY THE PLANNING AND DEVELOPMENT OFFICE NO LATER THAN 5:00 PM OF THE DATE REFLECTED ON THE ATTACHED SCHEDULE.
2. THE APPLICANT MUST RESPOND TO THE "STANDARDS" QUESTIONS ON PAGE 2 OF THIS APPLICATION (YOU MUST ANSWER "WHY" YOU BELIEVE THE APPLICATION MEETS THE TESTS FOR GRANTING A TEXT AMENDMENT). SEE ALSO **SECTION 19-2.3.2, AMENDMENTS TO TEXT AND ZONING DISTRICT MAP**, FOR ADDITIONAL INFORMATION. YOU MAY ATTACH A SEPARATE SHEET ADDRESSING THESE QUESTIONS.
3. YOU MUST ATTACH THE REQUIRED APPLICATION FEE: \$ 100.00.
4. THE ADMINISTRATOR WILL REVIEW THE APPLICATION FOR "SUFFICIENCY" PURSUANT TO **SECTION 19-2.2.6, DETERMINATION OF SUFFICIENCY**, PRIOR TO PLACING THE APPLICATION ON THE PLANNING COMMISSION AGENDA. IF THE APPLICATION IS DETERMINED TO BE "INSUFFICIENT", THE ADMINISTRATOR WILL CONTACT THE APPLICANT TO REQUEST THAT THE APPLICANT RESOLVE THE DEFICIENCIES. **YOU ARE ENCOURAGED TO SCHEDULE AN APPLICATION CONFERENCE WITH A PLANNER, WHO WILL REVIEW YOUR APPLICATION FOR "SUFFICIENCY" AT THE TIME IT IS SUBMITTED. CALL (864) 467-4476 TO SCHEDULE AN APPOINTMENT.**

**APPLICANT RESPONSE TO SECTION 19-2.3.2(E)(1), AMENDMENTS TO TEXT**  
**(YOU MAY ATTACH A SEPARATE SHEET)**

1. DESCRIBE THE WAYS IN WHICH THE PROPOSED AMENDMENT IS CONSISTENT WITH THE COMPREHENSIVE PLAN.

The 2009 Comprehensive Plan supports neighborhood design guidelines, pointing out that with infill development, "it will become important to address the character of existing neighborhoods and supply citizens with guidelines and tools to help preserve the character of existing and historic neighborhoods. "

2. DESCRIBE THE WAYS IN WHICH THE PROPOSAL IS CONSISTENT WITH THE PROVISIONS OF THE ORDINANCE AND RELATED CITY REGULATIONS.

19-3.2.2 (Q) establishes the Neighborhood Revitalization Overlay Districts "to enhance the compatibility of new development with design guidelines established for each neighborhood master plan approved by city council"

3. DESCRIBE THE CONDITIONS THAT HAVE CHANGED FROM THE CONDITIONS PREVAILING AT THE TIME THAT THE ORIGINAL TEXT WAS ADOPTED.

Even though the guidelines are enforceable, many are written as suggestions. As staff has been enforcing guidelines with building permits submitted, we recognize the need for more written design standards that will be incorporated in the Land Management Ordinance.

4. DESCRIBE THE WAYS IN WHICH THE PROPOSAL ADDRESSES A DEMONSTRATED COMMUNITY NEED.

Many of our Special Emphasis Neighborhoods are concerned about the impact of infill development in their neighborhoods. This proposal is intended to strengthen the guidelines as standards that are clearly and easily enforceable.

5. DESCRIBE THE WAYS IN WHICH THE PROPOSAL IS CONSISTENT WITH THE PURPOSE AND INTENT OF THE ZONING DISTRICTS IN THE ORDINANCE, WILL PROMOTE COMPATIBILITY AMONG USES, AND WILL PROMOTE EFFICIENT AND RESPONSIBLE DEVELOPMENT WITHIN THE CITY.

The purpose of the Neighborhood Revitalization Overlay is " to enhance the compatibility of new development." The proposal will ensure that new development is compatible with the surrounding neighborhoods.

6. DESCRIBE THE WAYS IN WHICH THE PROPOSAL PROMOTES A LOGICAL AND ORDERLY DEVELOPMENT PATTERN.

The design standards are intended to create compatible development between existing neighborhoods and new infill development. This proposal strengthens the standards to better ensure compatibility.

7. DESCRIBE THE WAYS IN WHICH THE PROPOSED AMENDMENT WILL RESULT IN BENEFICIAL IMPACTS ON THE NATURAL ENVIRONMENT AND ITS ECOLOGY, INCLUDING BUT NOT LIMITED TO: WATER; AIR; NOISE; STORMWATER MANAGEMENT; WILDLIFE; VEGETATION; AND, WETLANDS.

This proposal addresses site and architectural compatibility with existing neighborhoods. It will likely not have an impact on the natural environment.

8. DESCRIBE THE WAYS IN WHICH THE PROPOSED AMENDMENT WILL RESULT IN DEVELOPMENT THAT IS ADEQUATELY SERVED BY PUBLIC FACILITIES AND SERVICES (ROADS, POTABLE WATER, SEWERAGE, SCHOOLS, PARKS, POLICE, FIRE, AND EMERGENCY FACILITIES).

This proposal is related to infill development in existing neighborhoods, where public facilities and services should be adequate for new development.


19-3.2.2 (Q) *NRO: Neighborhood revitalization overlay district.*

- (1) *Purpose.* The purpose of the neighborhood revitalization overlay district (NRO) is to enhance the compatibility of new development with design ~~guidelinesstandards~~ established for each neighborhood master plan approved by city council. Providing for compatible development in NRO districts increases the opportunity for public, nonprofit, and private funds to be invested in these areas and eliminates or reduces the need for continual re-investment of time and funds to maintain or improve the neighborhood's quality of life.
- (2) *Location and applicability.* NRO districts are overlaid upon lands in the city having a base zoning district designation (see subsection 19-3.1.2). The boundaries of the various districts are reflected upon a map to be used in conjunction with the official zoning map; the regulations that apply to the districts, in addition to the underlying zoning district regulations, are contained within the NRO master plans approved by the city council.
- (3) *District-specific development standards.*
  - ~~(a) — Compliance with approved design guidelinesstandards. No permit for any new construction or expansion of existing structures that results in an increase in building footprint area of 50 percent or more on property within the NRO district may be issued until the administrator determines that the proposal complies with the design guidelinesstandards established for the NRO in which the property is located in section 19-6.12.~~
  - ~~(b) — Design guidelines. Each NRO master plan shall identify the design criteria to be applied to all new construction and expansion of existing structures.~~

Sec. 19-6.12. – Design Standards for Neighborhood Revitalization Overlay Districts.

(A) Single Family Detached and Duplex Dwellings. New housing should be compatible with the existing fabric of the community and promote a walkable environment.

- (1) Lot Width-40 feet minimum
- (2) Driveways: Shall at no point be wider than 10 feet (except in rear yard or connecting to an alley) and shall only be located to the side and/or rear of a house.
- (3) Walkways: All houses shall have a sidewalk between 3 and 5 feet wide that connects the front porch to the public sidewalk, or the front porch to the driveway if no public sidewalk exists.
- (4) Retaining Walls: Must be faced in stone, brick, or stucco, if visible from the public street.
- (5) Foundation: Slab foundations shall be elevated a minimum of 16 inches above finished grade on all elevations and shall consist of brick/stone. Crawlspace foundations shall consist of brick/stone veneer at a minimum height of 16 inches above finished grade on all elevations.
- (6) Building Height: 30 feet maximum, as defined in section 19-5.2.9(A)..
- (7) Roof: Shall be gable or hipped with pitch between 6/12 and 12/12.
- (8) Roof Overhang: 12 inch minimum.
- (9) Chimneys: Must be faced in stone or brick.
- (10) Attached Garages: Must be side or rear loading.
- (11) Accessory Structures: Must be located in the side or rear yard. Only one structure is permitted with 25 feet maximum height, as defined in section 19-5.2.9(A).
- (12) Front Porches: Must have a front porch at least 6 foot minimum depth and 8 foot minimum width. Porches shall not be enclosed and have at least two columns with a minimum 6 inch diameter each.
- (13) Exterior Walls: No concrete block masonry or metal is permitted. Stucco may be used as an accent.
- (14) Trim Details: 4 inch wide minimum (or 1 brick course) trim shall be used at windows, doors, corners, cornices, eaves, rakes, and fascias.
- (15) Fenestration (Doors and Windows): 25% minimum of the front façade shall be fenestrated and 10% minimum of each of the side and rear façades shall be fenestrated.

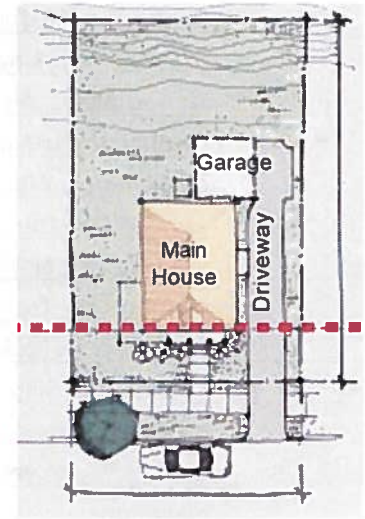



- (B) Single-Family Attached- New single-family attached housing should be compatible with the existing fabric of the community and promote a walkable environment.
- (1) Driveways: All driveways/parking areas shall be located to the side and/or rear of a unit. No front yard parking locations are permitted.
  - (2) Shared Alleys: All attached developments shall be required to share a rear parking access through the use of a shared alley. To the extent possible, alleys shall be accessed via the side of the block. Where not possible (i.e., infill development in block interiors), alleys shall be accessed via the primary street but shall have no more than 2 curb cuts.
  - (3) Walkways: Each individual unit shall have a sidewalk between 3 and 5 feet wide that connects the front porch to the public sidewalk (no shared walkway).
  - (4) Retaining Walls: Must be faced in stone, brick, or stucco, if visible from the public street.
  - (5) Foundation: Slab foundations shall be elevated a minimum of 16 inches above finished grade on all elevations and shall consist of brick/stone veneer. Crawlspace foundations shall consist of brick/stone veneer at a minimum height of 16 inches above finished grade on all elevations.
  - (6) Building Height: 30 feet maximum, as defined in section 19-5.2.9(A).
  - (7) Roof: Shall be gable or hipped with pitch between 6/12 and 12/12.
  - (8) Roof Overhang: 12 inch minimum.
  - (9) Roof Massing: All dwelling units shall have at least one gable or dormer facing the public street. Roof massing should be used to delineate each unit from one another.
  - (10) Chimneys: Must be faced in stone or brick
  - (11) Garages: Shall be provided only along the rear of the main dwelling structure and shall be accessed via a shared alley (no front-facing garages).
  - (12) Accessory Structures: Must be located in the rear yard. Only one structure is permitted with 25 feet maximum height, as defined in section 19-5.2.9(A).
  - (13) Porches: Each dwelling unit shall have front porches or stoops that are at least 6 feet minimum depth and 8 feet minimum width. Porches shall not be enclosed and have at least two columns with a minimum 6 inch diameter each.
  - (14) Doors: Each dwelling unit shall have a front door that faces the public street.
  - (15) Exterior Walls: No concrete block masonry or metal is permitted. Stucco may be used as an accent.
  - (16) Fenestration: 25% minimum of the front façade and 10% minimum of the rear façade shall be fenestrated. On end units only, 10% minimum of the side façade shall be fenestrated.




19-3.2.2 (Q) *NRO: Neighborhood revitalization overlay district.*

- (1) *Purpose.* The purpose of the neighborhood revitalization overlay district (NRO) is to enhance the compatibility of new development with design ~~guidelines~~standards established for each neighborhood master plan approved by city council. Providing for compatible development in NRO districts increases the opportunity for public, nonprofit, and private funds to be invested in these areas and eliminates or reduces the need for continual re-investment of time and funds to maintain or improve the neighborhood's quality of life.
- (2) *Location and applicability.* NRO districts are overlaid upon lands in the city having a base zoning district designation (see subsection 19-3.1.2). The boundaries of the various districts are reflected upon a map to be used in conjunction with the official zoning map; the regulations that apply to the districts, in addition to the underlying zoning district regulations, are contained within the NRO master plans approved by the city council.
- (3) ~~*District-specific development standards.*~~
  - ~~(a) —~~*Compliance with approved design ~~guidelines~~standards.* No permit for any new construction or expansion of existing structures that results in an increase in building footprint area of 50 percent or more on property within the NRO district may be issued until the administrator determines that the proposal complies with the design ~~guidelines~~standards established ~~for the NRO in which the property is located in section 19-6.12.~~
  - ~~(b) —~~*Design guidelines.* Each NRO master plan shall identify the design criteria to be applied to all new construction and expansion of existing structures.

Sec. 19-6.12. – Design Standards for Neighborhood Revitalization Overlay Districts.

(A) Single Family Detached and Duplex Dwellings. New housing should be compatible with the existing fabric of the community and promote a walkable environment.

- (1) Lot Width-40 feet minimum
- (2) Driveways: Shall at no point be wider than 10 feet (except in rear yard or connecting to an alley) and shall only be located to the side and/or rear of a house.
- (3) Walkways: All houses shall have a sidewalk between 3 and 5 feet wide that connects the front porch to the public sidewalk, or the front porch to the driveway if no public sidewalk exists.
- (4) Retaining Walls: Must be faced in stone, brick, or stucco, if visible from the public street.

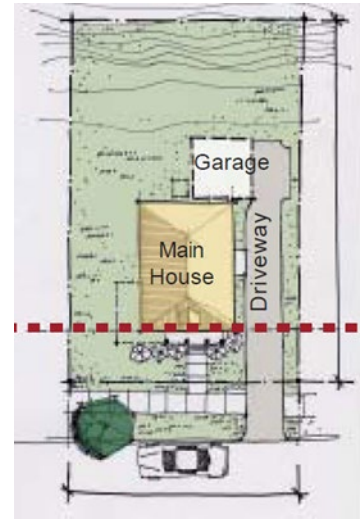

- (5) Foundation: Slab foundations shall be elevated a minimum of 16 inches above finished grade on all elevations and shall consist of brick/stone. Crawlspace foundations shall consist of brick/stone veneer at a minimum height of 16 inches above finished grade on all elevations.
- (6) Building Height: 30 feet maximum, as defined in section 19-5.2.9(A)..



- (7) Roof: Shall be gable or hipped with pitch between 6/12 and 12/12.
- (8) Roof Overhang: 12 inch minimum.
- (9) Chimneys: Must be faced in stone or brick.
- (10) Attached Garages: Must be side or rear loading.
- (11) Accessory Structures: Must be located in the side or rear yard. Only one structure is permitted with 25 feet maximum height, as defined in section 19-5.2.9(A).



- (12) Front Porches: Must have a front porch at least 6 foot minimum depth and 8 foot minimum width. Porches shall not be enclosed and have at least two columns with a minimum 6 inch diameter each.
- (13) Exterior Walls: No concrete block masonry or metal is permitted. Stucco may be used as an accent.
- (14) Trim Details: 4 inch wide minimum (or 1 brick course) trim shall be used at windows, doors, corners, cornices, eaves, rakes, and fascias.
- (15) Fenestration (Doors and Windows): 25% minimum of the front façade shall be fenestrated and 10% minimum of each of the side and rear façades shall be fenestrated.

(B) Single-Family Attached- New single-family attached housing should be compatible with the existing fabric of the community and promote a walkable environment.

(1) Driveways: All driveways/parking areas shall be located to the side and/or rear of a unit. No front yard parking locations are permitted.

(2) Shared Alleys: All attached developments shall be required to share a rear parking access through the use of a shared alley. To the extent possible, alleys shall be accessed via the side of the block. Where not possible (i.e., infill development in block interiors), alleys shall be accessed via the primary street but shall have no more than 2 curb cuts.

(3) Walkways: Each individual unit shall have a sidewalk between 3 and 5 feet wide that connects the front porch to the public sidewalk (no shared walkway).

(4) Retaining Walls: Must be faced in stone, brick, or stucco, if visible from the public street.

(5) Foundation: Slab foundations shall be elevated a minimum of 16 inches above finished grade on all elevations and shall consist of brick/stone veneer. Crawlspace foundations shall consist of brick/stone veneer at a minimum height of 16 inches above finished grade on all elevations.

(6) Building Height: 30 feet maximum, as defined in section 19-5.2.9(A).

(7) Roof: Shall be gable or hipped with pitch between 6/12 and 12/12.

(8) Roof Overhang: 12 inch minimum.

(9) Roof Massing: All dwelling units shall have at least one gable or dormer facing the public street. Roof massing should be used to delineate each unit from one another.

(10) Chimneys: Must be faced in stone or brick

(11) Garages: Shall be provided only along the rear of the main dwelling structure and shall be accessed via a shared alley (no front-facing garages).

(12) Accessory Structures: Must be located in the rear yard. Only one structure is permitted with 25 feet maximum height, as defined in section 19-5.2.9(A).

(13) Porches: Each dwelling unit shall have front porches or stoops that are at least 6 feet minimum depth and 8 feet minimum width. Porches shall not be enclosed and have at least two columns with a minimum 6 inch diameter each.

(14) Doors: Each dwelling unit shall have a front door that faces the public street.

(15) Exterior Walls: No concrete block masonry or metal is permitted. Stucco may be used as an accent.

(16) Fenestration: 25% minimum of the front façade and 10% minimum of the rear façade shall be fenestrated. On end units only, 10% minimum of the side façade shall be fenestrated.

